


## Angular Contact Ball Bearing

DLR Design Super precision angular contact ball bearings -**HCB7019-EDLR-T-P4S**

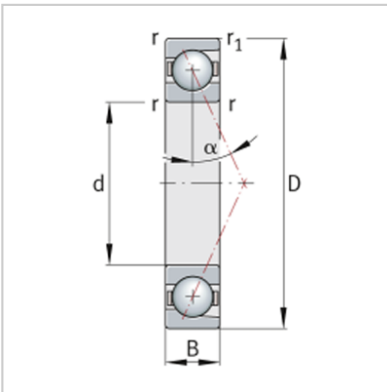

Designation	<b>HCB7019-EDLR-T-P4S</b>
Main dimensions	
d	95
D	145
B	24
Basic load ratings	
Dyn. Cr(KN)	77
Stat. Cor( kN)	49.5
Fatigue limit load	
Cur N	3450
Limiting speeds	
nG grease min	12000
nG oil min	18000
Dimensions	
r min.	1.5
r1 min.	1.5
BN	5.5
SN	14.5
SB	2.2
Contact angle	
a °	25
Mounting dimensions	
da h12	105
Da H12	136
ra max.	1.5
ra1 max.	0.6
Preload force FV	
L N	322
M N	1220
H N	2622
Lift-off force KaE	
L N	924
M N	3581
H N	7871
Axial rigidity ca	
L N/μm	203
M N/μm	328
H N/μm	439
Mass	
m = kg	0.98

## Spindle bearing

Spindle bearings HCB70/72/718/719..-EDLR, adjusted, matched pairs or sets, contact angle  $\alpha = 25^\circ$ , with ceramic balls, restricted tolerances, for direct oil feed via outer ring, with inserted O rings