


## Angular Contact Ball Bearing

DLR Design Super precision angular contact ball bearings -**XC71912-EDLR-T-P4S**

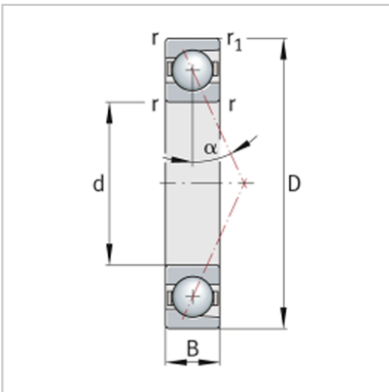

Designation	<b>XC71912-EDLR-T-P4S</b>
Main dimensions	
d	60
D	85
B	13
Basic load ratings	
Dyn. Cr(KN)	19.4
Stat. Cor( kN)	8.3
Fatigue limit load	
Cur N	630
Limiting speeds	
nG grease min	28000
nG oil min	43000
Dimensions	
r min.	<b>1</b>
r1 min.	<b>1</b>
BN	2.8
SN	7.2
SB	1.4
Contact angle	
a °	25
Mounting dimensions	
da h12	65
Da H12	80.5
ra max.	0.6
ra1 max.	0.3
Preload force FV	
L N	52
M N	155
H N	311
Lift-off force KaE	
L N	148
M N	452
H N	917
Axial rigidity ca	
L N/μm	97.7
M N/μm	144
H N/μm	186
Mass	
m = kg	0.179

## Spindle bearing

Spindle bearings HCB70/72/718/719..-EDLR, adjusted, matched pairs or sets, contact angle  $\alpha = 25^\circ$ , with ceramic balls, restricted tolerances, for direct oil feed via outer ring, with inserted O rings