


## ZKLF ZKLN Double Direction Axial Angular Contact Ball Bearings

### ZKLF Axial angular contact ball bearings-ZKLF3590-2RS-2AP

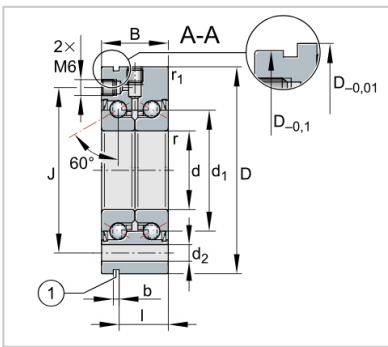

Designation	<b>ZKLF3590-2RS-2AP</b>
Mass $m = \text{kg}$	2.26
Dimensions	
d -0,005	<b>35</b>
D -0,01	<b>90</b>
B -0,25	68
d1	52
r min.	0.3
r1 min.	0.6
J	75
d2	8.8
b	<b>3</b>
l	<b>59</b>
Pitch $n \times t$	$8 \times 45^\circ$
Mounting dimensions	
Da max.	62
da min.	45
t1	0.2
Fixing screws	DIN EN ISO 4762 10.9
Size	M8x80
$n \times t_a$	$8 \times 45^\circ$
Basic load ratings axial	
dyn. Ca N	73000
stat. C0a N	177000
Fatigue limit load $Cu$	10500
N	
Limiting speed $nG$	4400
grease min-1	
Thermally safe	2000
operating speed $nP$	
min-1	
Bearing frictional torque	0.9
MR Nm	
Rigidity axial caL N/ $\mu\text{m}$	1600
Tilting rigidity ckL	900
Mass moment of inertia	3.02
Mm	
Axial runout $\mu\text{m}$	2.5
Recommended INA precision locknut	
For radial locking	ZMA35/58
For axial locking	AM35/58
Tightening torque MA	40
Nm	
Required locknut force	10770
axial N	