


ZKLF ZKLN Double Direction Axial Angular Contact Ball Bearings

ZKLF Axial angular contact ball bearings-ZKLF50115-2RS-PE

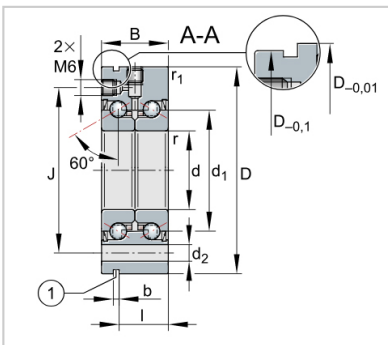

Designation	ZKLF50115-2RS-PE
Mass $m = \text{kg}$	1.86
Dimensions	
d -0,005	50
D -0,01	115
B -0,25	34
d1	72
r min.	0.3
r1 min.	0.6
J	94
d2	8.8
b	3
l	25
Pitch $n \times t$	12 \times 30°
Mounting dimensions	
Da max.	82
da min.	63
t1	0.2
Fixing screws	DIN EN ISO 4762 10.9
Size	M8
$n \times t_a$	6 \times 60°
Basic load ratings axial	
dyn. $C_a \text{ N}$	46500
stat. $C_{0a} \text{ N}$	126000
Fatigue limit load C_u	5600
N	
Limiting speed n_G	3200
grease min-1	
Thermally safe	1500
operating speed n_P	
min-1	
Bearing frictional torque	0.9
MR Nm	
Rigidity axial $c_{aL} \text{ N}/\mu\text{m}$	1250
Tilting rigidity c_{kL}	1000
Mass moment of inertia	5.24
Mm	
Axial runout μm	5
Recommended INA precision locknut	
For radial locking	ZM50
For axial locking	AM50
Tightening torque MA	85
Nm	
Required locknut force	16280
axial N	